

195L
TOTAL
CAPACITY

QUAD
OVEN
TECHNOLOGY

COOL
TOUCH

5
YEAR
WARRANTY



Scan for more info



Colours

Boutique



Standard




Boutique Colours: Dusty Pink: BRD900GTGDP | Seafoam Blue: BRD900GTGSB
 Country Blue: BRD900GTGCB | Mojito Mint: BRD900GTGMM | Thunder Blue: BRD900GTGTB | Kingfisher Teal: BRD900GTGKT
 Midnight Blue: BRD900GTGMB | Graphite: BRD900GTGGR | British Racing Green: BRD900GTGBRG | Chilli Red: BRD900GTGCHR
 Porcini Mushroom: BRD900GTGPM | Cream: BRD900GTGCR | White: BRD900GTGWH | Standard Colour: Black: BRD900GTGB

Features & Benefits



Quad Oven Technology™

Market leading technology combining the Proflex™ Splitter and Equiflow™ twin fans. Transforms three ovens into four, giving you more flexibility when you need it.



Huge 195L Capacity


Maximum capacity, endless results. Creating as much space as possible. Our combined 195L capacity ovens give you the versatility of cooking the largest roast and baking desserts for the masses, all at once.



1

Oven 1: 37L Compact Oven with Grill

Perfect for efficiently cooking small meals, the compact oven combines a conventional oven with a multi-function grill.



2

Oven 2: 64L Multi-function Oven for Perfect Results

With 13 settings to choose from including Fan and Conventional options, Pizza function, Grill settings and more; you can perfectly cook anything from pavlova to pastizzi with ease.



3

4

Oven 3 & 4: 94L Oven with Quad Oven Technology™

Flexibility of a large oven capacity or two independent ovens using Quad Oven Technology™. The Proflex™ Splitter creates two independent sealed ovens while the Equiflow™ Twin Fans maintain even and independent temperatures.



Gas-Through-Glass Cooktop with Wok Burner

Sleek EuroKera glass cooktop with 5 burners including a powerful 18mJ wok burner and cast iron pan supports for stability. A flame safety device fitted to each burner cuts off the gas supply should the flame ever go out.



Additional Features

Includes removable double extending telescopic runners, a large easy to read white LED display and touch control screen, full width oven pans, premium knobs and rear wheels.

Functions

Top Left



Multi-function Grill Oven

Tall Right



Grill Fan Slow Cook Keep Warm Bread Proving Light


Bottom Left



Grill Oven Fan Intensive Bake Top Heat Base Heat



Base Heat with Fan Fan Grill Slow Cook Pizza Keep Warm Bread Proving Defrost Light

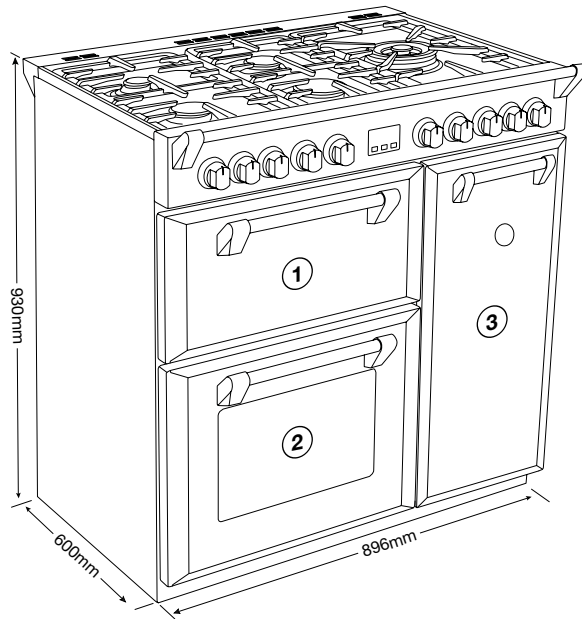

If this appliance is installed near vinyl wrapped surfaces, we strongly recommend using an installation kit available from the vinyl-wrap supplier. Belling cannot accept any responsibility for damage caused due to installation into cabinets with low temperature tolerances.

RICHMOND DELUXE BRD900GTG

| | | | |
|---|-------------------------------------|--|--|
| COOKTOP | | | |
| No. of burners | 5 | | |
| Fuel | Gas | | |
| GAS COOKTOP | | | |
| Front Left (MJ/h) | Medium - 7.2 | | |
| Rear Left (MJ/h) | Small - 3.6 | | |
| Front Centre (MJ/h) | Large - 10.8 | | |
| Rear Centre (MJ/h) | Medium - 7.2 | | |
| Centre Right (MJ/h) | Wok - 18.0 | | |
| Cast iron pan supports | Yes | | |
| Automatic ignition | Yes | | |
| Flame safety device | Yes | | |
| Wok cradle | Yes | | |
| CAVITY 1 | | | |
| Position | Top left | | |
| Function | Conventional oven and grill | | |
| ELECTRIC OVEN / GRILL | | | |
| Variable rate dual circuit electric grill | Yes | | |
| Conventional electric oven | Yes | | |
| CAVITY 1 FEATURES | | | |
| Oven capacity (litres) | 37 (Gross) / 31 (Net) | | |
| Internal dimensions (mm) | 420 (w) x 180 (h) x 430 (d) | | |
| Power (kW) | Oven (1.4) & Grill (1.7 / 2.7) | | |
| No. of shelves | 1 | | |
| No. of shelf positions | 2 | | |
| Full width oven pans with reversible trivet | 1 | | |
| Door opening | Drop-down | | |
| CAVITY 2 | | | |
| Position | Bottom left | | |
| Function | Multi-function oven | | |
| ELECTRIC OVEN | | | |
| Variable rate electric grill | Yes | | |
| Conventional electric oven | Yes | | |
| Fanned electric oven | Yes | | |
| Defrost | Yes | | |
| Intensive bake (top, bottom & fan) | Yes | | |
| Top heat only | Yes | | |
| Base heat only | Yes | | |
| Base heat with fan | Yes | | |
| Grill with fan | Yes | | |
| Slow cook | Yes | | |
| Pizza | Yes | | |
| Keep warm | Yes | | |
| Bread proving | Yes | | |
| CAVITY 2 FEATURES | | | |
| Oven capacity (litres) | 64 (Gross) / 54 (Net) | | |
| Internal dimensions (mm) | 420 (w) x 325 (h) x 395 (d) | | |
| Power (kW) | Oven (3.1) & Grill (1.7 / 2.7) | | |
| No. of shelves | 2 | | |
| No. of shelf positions | 6 | | |
| Full width oven pans with reversible trivet | 1 | | |
| Telescopic shelves | 1 double extending, removable | | |
| Oven light | Yes | | |
| Programmable timer | Yes | | |
| Door opening | Side opening | | |
| CAVITY 3 | | | |
| Position | Tall right | | |
| Function | Split fanned oven / grill | | |
| ELECTRIC OVEN | | | |
| Fixed rate electric grill | Yes | | |
| Fanned electric oven | Yes | | |
| Slow cook | Yes | | |
| Keep warm | Yes | | |
| Bread proving | Yes | | |
| CAVITY 3 FEATURES | | | |
| Oven capacity (litres) | 94 (Gross) / 79 (Net) | | |
| Internal dimensions (mm) | 350 (w) x 620 (h) x 395 (d) | | |
| Power (kW) | Oven (3.0) & Grill (1.7) | | |
| No. of shelves | 3 | | |
| No. of shelf positions | 8 | | |
| Oven Light | Yes | | |
| Door opening | Side opening | | |
| TIMER | | | |
| Minute minder | Yes | | |
| Key lock feature | Yes | | |
| INSTALLATION | | | |
| Minimum gap required to fit appliance (mm) | 916 (10mm clearance each side) | | |
| Gas type | NG / ULPG (conversion kit included) | | |
| Gas inlet type | 1/2" BSP female | | |
| Gas inlet position | Rear right | | |
| Power supply | 240V/415V single phase / 3 phase | | |
| Total electrical power load (kW) | 8.98 | | |
| Current rating (A) | 25* | | |
| Total Gas Consumption NG (MJ/h) | 46.8 | | |
| LPG conversion kit included | Yes | | |
| DIMENSIONS (PRODUCT) | | | |
| Height x Width x Depth (mm) | 900 - 930 x 896 x 600 | | |

*The amperage noted is the assessed maximum demand as per Table C5 Maximum Demand – Domestic Cooking Appliances. This appliance needs to be installed by a licensed electrician who can assess the requirements of the appliance and provide installation advice applicable to the environment for which the appliance shall be installed in.

Additional accessories available - please see belling.com.au for more information