54cm Electric Freestanding Cooker




Ceramic Cooktop and Electric Oven







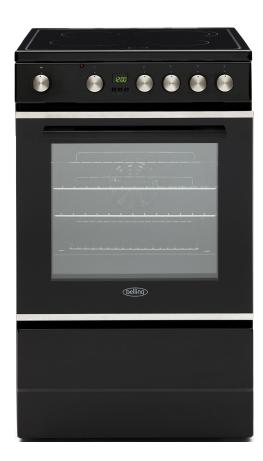

Colours



Black: BFS54SCCG

Features & Benefits



85L Muti-function Oven

With 8 settings to choose from including Fan Forced, Conventional, Defrosting function, Grill settings and more; you can perfectly cook anything from pavlova to pastizzi with ease.



Ceramic Cooktop

4 elements with variable temperature control, includes 1 extendable zone for large pots and pans. Features an easy to clean glass surface and residual heat indicators.



Additional Features

Includes an LED display with push button controls, programmable timer and minute minder, storage drawer and full width oven pan with wire rack.

Functions



Fan Forced








Conventional

Full Grill



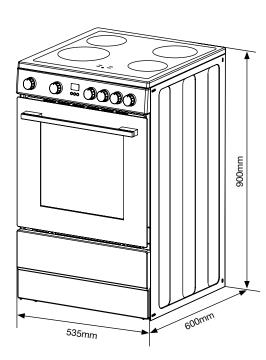

BFS54SCCG

СООКТОР	
No. of burners	4
Fuel	Electric
CERAMIC COOKTOP	
Front left (kW)	1.8 (192mm)
Rear left (kW)	1.2 (152mm)
Front right (kW)	1.2 (152mm)
Rear right (kW)	1.8 - 2 (121 - 192mm)
Control type	Rotary control knobs
No of power levels	Variable temperature control
Extendable zones	1
Residual heat indicators	Yes
Safety switch-off	Yes
CAVITY	
Function	Multi-function oven
GAS OVEN / GRILL	
Full grill	Yes
Half grill	Yes
Fan grill	Yes
Conventional	Yes
Fan forced	Yes
Base heat with fan	Yes
Defrost	Yes
Light	Yes

CAVITY FEATURES	
	05 (0) (70 (1))
Oven capacity (litres)	85 (Gross) / 73 (Net)
Internal dimensions (mm)	423 (w) x 392 (h) x 407 (d)
No. of shelves	2
No. of shelf positions	5
Full width oven pan with grill insert	1
Oven light	Yes
Programmable timer	Yes
Door opening	Drop-down
Triple glazed door	Yes
Catalytic oven liners	Yes
Storage drawer	Yes
TIMER	
Push button control	Yes
Minute minder	Yes
Fully programmable timer	Yes
INSTALLATION	
Minimum gap required to fit appliance (mm)	540
Electrical connection	39A hardwire
Power supply	220 - 240V, 50 / 60Hz
Total electrical power load (W)	7830 - 9320
DIMENSIONS (PRODUCT)	
Height x Width x Depth (mm)	900 x 535 x 600

If this appliance is installed near vinyl wrapped surfaces, we strongly recommend using an installation kit available from the vinyl-wrap supplier. Belling cannot accept any responsibility for damage caused due to installation into cabinets with low temperature tolerances.

